



VisualRplus Visual Radio System

AEQ VisualRplus is a Visual Radio system consisting in a group of cameras and a powerful video switcher. It allows you to further capitalize on your investment and reaching an alternative and viewing audience to your regular Radio Programming and through an additional broadcast channel. The addition of content to your regular radio broadcast when streaming over the internet allows you to reach and attract an alternative and dynamic audience. Further, the combination of a general video stream with other video content, will allow you to benefit from additional advertising revenues.

The seamless integration with for example, AEQ's consoles and AoIP Network interfaces, provides with full automation of the camera controls through the powerful Video switcher. The programming of the switcher can virtually be as complex as one wants it to be in regards to transitions, camera angles, tilt, zoom, etc., providing a fully automated Video production that will follow the Audio for the regular Radio Program. This automation is aiming at not adding any extra workload to production but can of course be overridden at any given moment, allowing the producer to take control if for example, the talent so requests.

The engineering, configuration and programming and training of **AEQ's VisualRplus** systems can be customized on-line or, with sufficient definition data, delivered as a turnkey project.

EXPAND AND DIVERSIFY YOUR AUDIENCE

INCREASE YOUR REVENUES





How it works

VisualRplus generates visual contents in parallel with the regular radio production and that combines for a program that can be streamed on-line or broadcasted as a traditional Television feed. The content creation for Radio is increasingly demanding and becoming similar to the production for a TV channel.

VisualRplus is in reality the typical system setup and employed for small and medium-sized TV stations that need a high level of automation for their production. It offers the same and great amount of resources for the content production and has all the tools that makes it ideal for visual radio and smaller TV Broadcasting stations.

The difference between the production for a TV stations and Radio station, is that radio usually don't employ specific TV production personnel for visual Radio, but relies on the capacity of the Video Switcher automation and the Video following Audio for the production. VisualRplus allows, through its camera control software, for the automatic programming of macros based on external events, that it turn will automate the production of the broadcast video signal.



Adding the **MIX PLAYOUT** option, the device turns into a complete TV head-end with broadcast automation for the video content based on play-lists that can be programmed to cover any schedule 24/7.





How it works

The **VisualRplus** video production system integrates seamlessly AEQ's mixing consoles. Via IP the consoles will provide the Video Switcher with information about what microphones are open and at what level.

If no AEQ Mixer is available in the setup, an **AEQ AoIP Interface** such as the **Netbox 8V or 32V** can be used to provide the necessary information regarding open microphone and levels to the video switcher.

Additionally, instructions to the video production system can be provided from the programmable keys of the **Atrium, Forum and Capitol IP Mixing Consoles** and via control objects in the AEQ AudioPlus radio automation system. That way, the video production system's control is integrated in the mixing console and automation system, so the control technician can send instructions to the system without the need for any additional device.

AEQ VisualRplus Visual Radio system is based on a video switcher/processor, that manages the signals, switches between and mixes them, providing a final program to be broadcasted in both in high quality IP and in compressed IP format adequate for streaming. It can also record its own produced signal. It has IP and HDMI video inputs and outputs, and optionally, SDI and analogue.


The cameras are connected to the IP inputs. We recommend and offer HD IP NDI cameras in PTZ format. The camera pan, tilt and zoom functions are automated, following the defined programming for input priorities, levels, attack and release times of the microphone signals and transitions. This allows for the production personnel to focus on the different guests and speakers in the studio.

Here comes into play AEQ's consoles or IP Interfaces themselves. Upon receiving the audio signals from the different microphones or other sources, this equipment will provide the information of the active ones to the video switcher that will then produce the program signal as per the previously mentioned defined programming.

Apart from this information, AEQ's mixing consoles and automation systems, can send different instructions using their programmable function keys: launch clips, insert logos, introduce messages with the character generator, override macros, switch camera or even directly changing the complete programming created for a specific radio programme giving way to a different one with a modified programming. This becomes key when integrating operation of a visual radio system into the radio's traditional technical workflow.

When the audio-visual media has radio and TV channels, there are times where the video signal produced in the radio studio turns into very valuable content for TV itself. In such cases, a more sophisticated production of the signal may be required.

AEQ's system can also be operated by a traditional video producer, obtaining a more creative and bespoke result that allows sharing the signal generated for its Visual Radio broadcasting with the TV channel. It allows for the connection of external video switcher control panels with physical keys and T controllers to switch the on air signal.

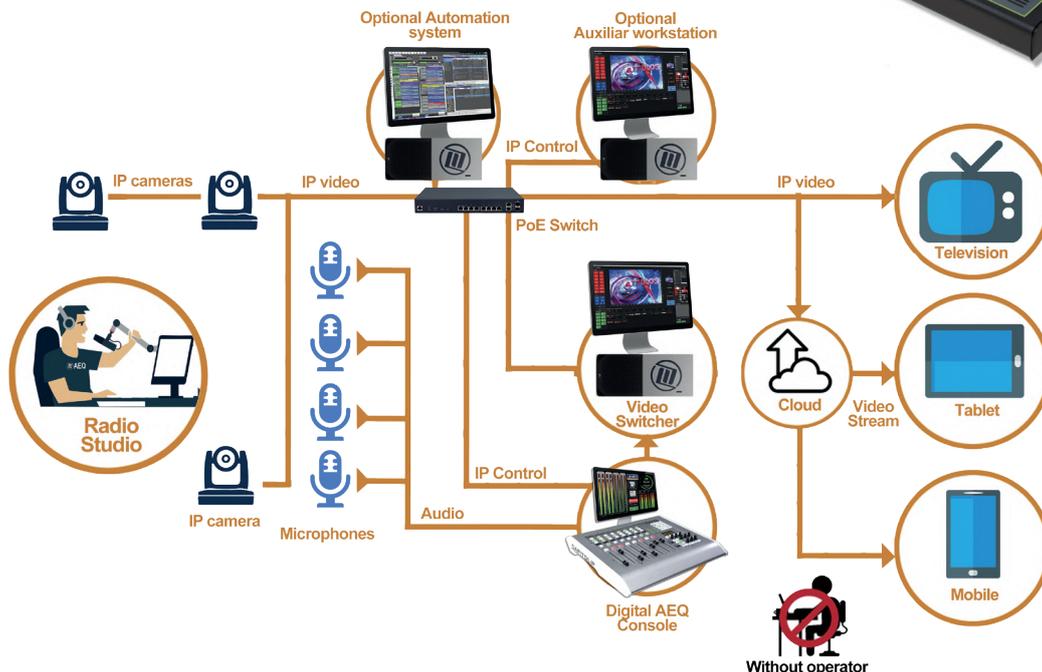



AEQ VisualRplus Video Switcher

The Visual Radio system proposed by AEQ is based on the AEQ VisualRplus switcher, a compact system that integrates all of the features required for the generation of a professional video signal.

The configuration is based on a type Z1 Workstation with an Intel Core i9 processor with 32 GB of RAM, 1 TB SSD system disk and a 4 TB HDD storage disk. A second network card allows you to separate the audio and video control. It incorporates Dante Virtual Soundcard, for AoIP reception. With Windows 11 Pro. It includes a 28" monitor with 4K resolution. Its dimensions make it installable as a minitower or horizontally on a tray in a 4U-high standard rack.

Visual Radio Software license in the ALL IN ONE mode is included. Includes Audio/Video Production Mixer with 8 inputs in SDI formats (installing optional card), HDMI, NDI®, STREAMING (RTSP or RTMP), Images or USB. Multi-layer Character Generator, Streaming, A/V PLAYER. File and Base Band input, 12 Audio channels Mixer, PTZ Camera Control, Effect Mixer, Recording Mixer, Capture Screen, Logo Insertion, Hour, Temperature and Humidity Insertion, Stopwatch, etc.

Optional Video Cards

If SDI video inputs and outputs are required, it can be equipped with a card offering 4 or 8 inputs and outputs.



AEQ BA20NDI professional cameras

Professional camera with PTZ / NDI system and 20x optical zoom.

With a high quality 1/2.7 inch CMOS HD sensor, it offers a 20x optical zoom plus a 16x digital one. The high SNR CMOS sensor with digital 2D and 3D noise reduction works well even under low light conditions, down to 0.5 Lux.

It offers horizontal (-170° to 170°) and vertical rotation (-30° to 90°). Multiple control ways, IP with NDI protocols among them.

It's a live transmission professional Full HD camera which can simultaneously produce video with resolution up to 1080p at 60 fps in 3G-SDI & HDMI, and IP streaming flows (MJPEG & H.264 & H.265). Compatible with PoE (802.3af), RTSP, RTMP, SRT and other technologies.





Complementary Licences



AEQ MIX PLAYOUT

PLAYOUT PLUG IN, Multiformat playout system for automated 24/7 video broadcasting. With customizable SQL Databases, Metadata definition, Automation and Live Work Functions, Configurable Broadcasting Programming Grids, Various Reports, User Control, Schedule, Hot Key, Video Trim, etc.

AEQ MIX CHROMA

MIX CHROMA PLUG IN. Allows you to create Chroma Key from 1 to 4 inputs simultaneously.

AEQ MIX RRSS1 (Social Networks)


PLUG IN for AEQ VisualRplus for Social Media integration, allows you to send VisualRplus, Facebook, Twitter content, RSS or XML feed automatically or manually. Totally customizable, with styles, text, graphics, user-defined filters to avoid non desired data. This module works remotely on any PC in the network and does not require internet access in the AEQ VisualRplus switcher license valid for the first year of use. Includes updates released during the first year.

AEQ MIX RRSS+

Usage time extension of the PLUG IN AEQ MIX RRSS1 for an additional year since the end of the initial or previous license. Includes updates released during that year.

AEQ MIX CAL

CAL (Client Access License). Each CAL allows you to perform functions such as file input, executing the Character Generator, etc. from adifferent Microsoft Windows® or MAC® device in the network.



Hardware and complementary

RECOMMENDED PC

Additional PC recommended for programming from outside the Video Switcher. Compatible with the AudioPlus automation system. Includes 24" monitor. Allows for the installation of AEQ MIX CAL or AEQ MIX RRSS plug ins to prepare work outside the Principal WS.

AR2100X01

24-port Ethernet switch with PoE.

CAMERA CONTROL THROUGH AUDIO

Depending on the audio console used in your system, it should include one of the following options to be able to provide information about each microphone level to the camera controllers.

ATX VX, FORUM VX, CAPITOL VX: Audio level detector license for AEQ ATRIUM, FORUM y CAPITOL consoles, respectively.

NETBOX 8 AD VX



Interface and 16 channel audio level detector. It works as a mutichannel level detector for camera selection in Visual Radio systems. It reads the audio levels at its 4 analog, 4 digital and 8 Dante inputs and sends the reading to the AEQ VisualRplus Visual Radio system through the IP network. Dimensions: 1U x ½ 19", (207x41mm).

NETBOX 32 AD VX

Interface and 64 channel audio level detector. It works as a multichannel level detector for camera selection in Visual Radio systems. It reads the audio levels in its 16 analog, 16 digital and 32 Dante inputs and sends the reading to the AEQ VisualRplus Visual Radio system through the IP network. Dimensions: 1U x 19".



Basic System

Integrated multi-application system developed and integrated for Visual Radio, also valid for multimedia programming for TV, social, corporate or institutional events, etc. In the "All in One" mode, it integrates audio and video mixer, video broadcasting templates, streaming, IP or base-band video input, file input, etc. Configurable on a single PC or using distributed workflow between multiplesystems in the network.



Includes broadcast-performance Character Generator Editor (CG)

Multilayer CG, Graphics and Titling in Real Time, Compatible with AVI files with Alpha Channel, TGA and PNG file types, Multiple Crawl broadcasting, Rolls, Branding, Videos, Stopwatch, Time, Temperature and Humidity, Logos, etc.

Operating capabilities

VisualRplus' flexibility allows you to perform multiple operations, depending on its configuration:

- ✓ Up to 8 inputs mixer.
- ✓ Operating Resolution up to 1920x1080px.
- ✓ Compatible with NDI® protocol.
- ✓ Up to 8 SDI, HDMI, NDI®, STREAMING (RTSP or RTMP), USB or image inputs.
- ✓ 2 SDI or HDMI or NDI® outputs + RTMP STREAMING.
- ✓ Live video Streaming Encoder.
- ✓ Fx MIXER with up to 4 Channels for Picture In Picture.
- ✓ 6 superimpose graphic layers.
- ✓ 1 Recording Channel.
- ✓ Multiformat AV-Player with individual playback.
- ✓ Definition of multiple PiP Preset.
- ✓ Up to 8 simultaneous videocalls via NDI® or STREAMING (RTSP or RTMP).
- ✓ iOS or ANDROID remote control.
- ✓ Touch Screen Monitor Option.
- ✓ PTZ, WEB, HDMI y SDI camera support.
- ✓ Unlimited transitions.
- ✓ Macro programmer.
- ✓ On screen preview.
- ✓ Real Time Capture Screen.
- ✓ Audio Mixer.
- ✓ Control surfaces.
- ✓ IP Integration with AEQ consoles.
- ✓ IP integration with AEQ AudioPlus automation system.
- ✓ GPI/GPO.

AEQ MIX PLAYOUT Option

For automatic multiformat video playout and broadcasting on a 24/7 basis. Metadata Definition, Automation and live broadcasting functions, configurable playout grids, Various Reports, User Control, SQL Database, Scheduler, Hot Key, Video Trim, etc.



AEQ MIX CHROMA Option

Allows you to create Chroma Key from 1 to 4 inputs simultaneously.








AEQ MIX RRSS1 Option

Allows content from Facebook, Twitter, RSS feed or XML to be sent to VisualRplus automatically or manually, fully customisable, with user/defined styles, text, graphics, filter to avoid unwanted data.



Application Functions

- Video File Intake.
 - o Video image extraction.
 - o Video crop.
- AV mixer module.
 - o Input assignment.
 - o Choice of input images.
 - o Input delivery to PRV and PGM.
 - o Automatic and manual transition generation.
 - o Picture in picture (PIP) management.
- PTZ camera control.
- AV player playlist management.
- Macro management: programming, execution, edition.
- Recording from: an input, preview or program.
- Creation and modification of screen templates.
- CG (Computer graphics edition) with automatic filed information insertion.
 - o Template generation with element placement.
 - o Generation of transitions between templates.
 - o Adjustment and sorting of images and other objects on the templates.
 - o Image edition from inside the template.
 - o Video insertion, with loop playback option.
 - o Insertion and formatting of still and moving texts.
 - o Date, time, temperature, humidity, thermic sensation and score data insertion.
- Selection and adjustment of the program's audio.
- Database module with:
 - o Users and access privileges.
 - o Clients and their characteristics.
 - o Management of content categories and subcategories.
 - o Management of customized databases.
 - o Artists management.
 - o Management of playback registries and reports exportation.
- General configuration module.
 - o Operation video and audio formats.
 - o Activation of video and audio output devices and formats.
 - o Activation of video and audio input devices and formats.
 - o Integration of additional SDI video cards.
 - o Camera configuration: USB, IP, SDI.
 - o Auxiliary audio inputs.
 - o Streaming profiles.
 - o Input distribution between monitors.
 - o Recording characteristics.
 - o Mixer sessions or instances.
 - o License control.
- MIX PLAYOUT option for playlist management with:
 - o Video search and insertion.
 - o Playlist creation with sequential or random reproduction.
 - o Playout events insertion.
 - o Insertion and removal of external programs in the playout.
- ON AIR MIX CHROMA Option. Allows you to create Chroma Key from 1 to 4 inputs simultaneously.
- MIX RRSS option.
 - o Allows you to send Facebook, Twitter, RSS or XML feed contents automatically or manually to VisualRplus.
 - o Totally customizable styles, text and graphics.
 - o Includes user-defined filters, to avoid undesired data.

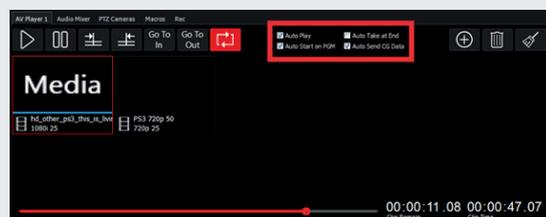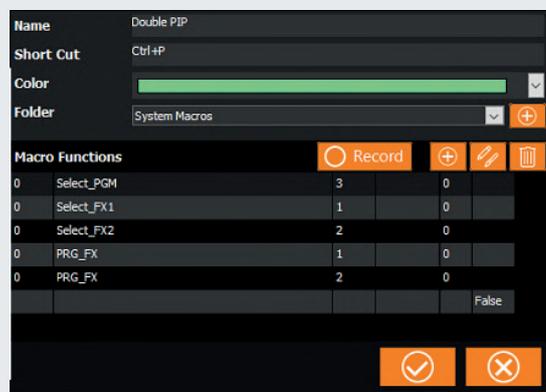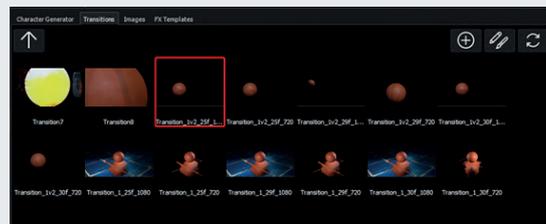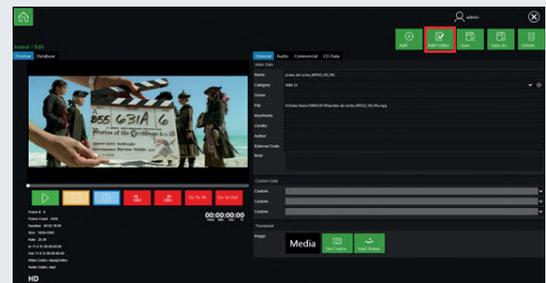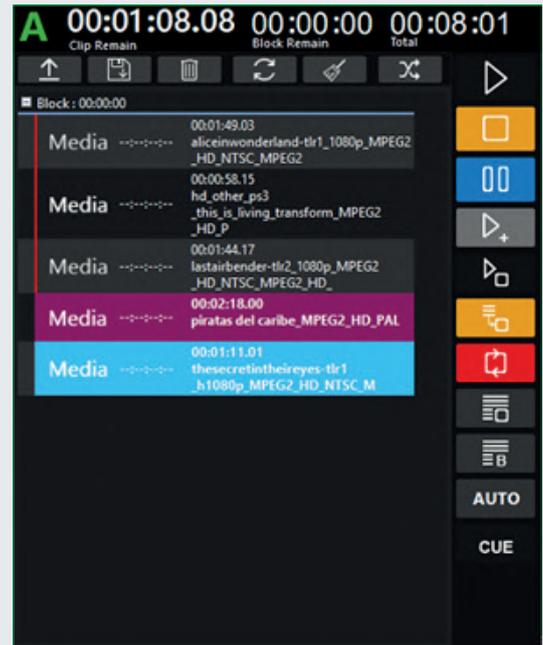



Get a wider audience

Give your programmes more dynamism

Maximize your channel's revenue opportunities

AEQ - HEADQUARTERS

Margarita Salas, 24
28919 Leganés · Madrid · Spain
Tel.: +34 91 686 13 00
Fax: +34 91 686 44 92
website: www.aeq.eu
e-mail: aeqsales@aeq.es

AEQ - CATALUNYA

Tel.: +34 93 414 03 96
e-mail: nolivella@aeq.es

AEQ - PORTUGAL

Tel.: +351 917 529 243
e-mail: apicarra@aeq.es

AEQ - INDIA

Tel.: +91 98184 31432
e-mail: tkurien@aeq.es

AEQ - KROMA MEXICO

Tel.: +52 55 5413 2716
e-mail: creyna@aeq.es

AEQ - USA

Tel.: +1 (954) 581 79 99
e-mail: sales@aeqbroadcast.com